
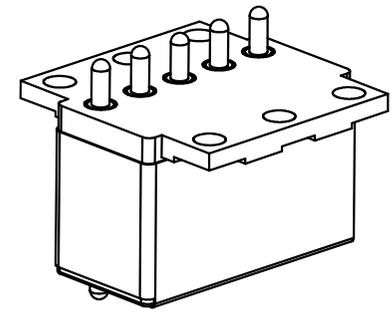
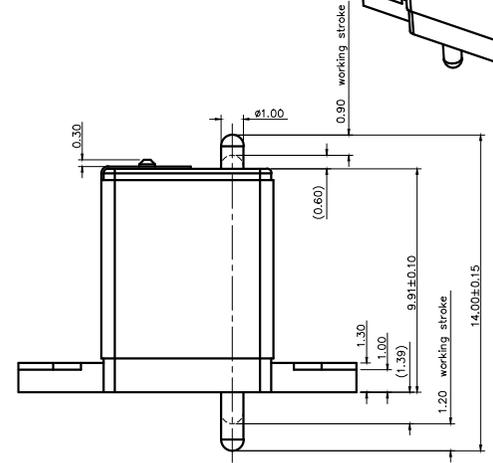


Please Approve this Drawing

Date	
Signature	

NO.	Part Name	Q'TY	Material	Plated surface
1	Housing	1	PA9T	black
2	Plunger	5	C3604	AU 3 U" MIN OVER 50~100 U" NI
3	Barrel	5	C3604	AU 3 U" MIN OVER 50~100 U" NI
4	Spring	5	SUS304	Not Plated
5				

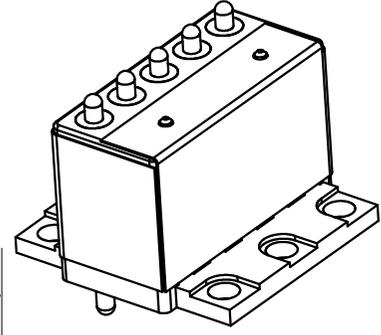

- Notes:
- Electrical
 - Rated Current&Voltage:DC 12V 1.5A Max.
 - Contact Resistance:60 mohm maximum at Working Height(quiessence)
 - Mechanical
 - Spring Force :80g±15g at Working Height
 - Durability:10000 Cycles(minimum)
 - To ensure the best usage,please operate it based on the working Height
 - Based on the Engineering Drawings,shall not exceed the maximum allowed compression
 - ROHS&HF

DRAWN	Ant	DATE	2014.09.22			 Dongguan Promax Electronics Technology Co., Ltd
CHECKED		SCALE	10:1	VER.	B.0	
APPROVED		TITLE	pogo pin connector.			Ang:
PROJECT		DRAWING NO.	C075-05R			0 ±1°
SHEET	1 of 1	UNIT	mm			.0 ±0.5°
						.00 ±0.25°
						Dim: 0 ±0.20
						.0 ±0.15
						.00 ±0.10

VER.	DESCRIPTION	ECN NO.	DATE