
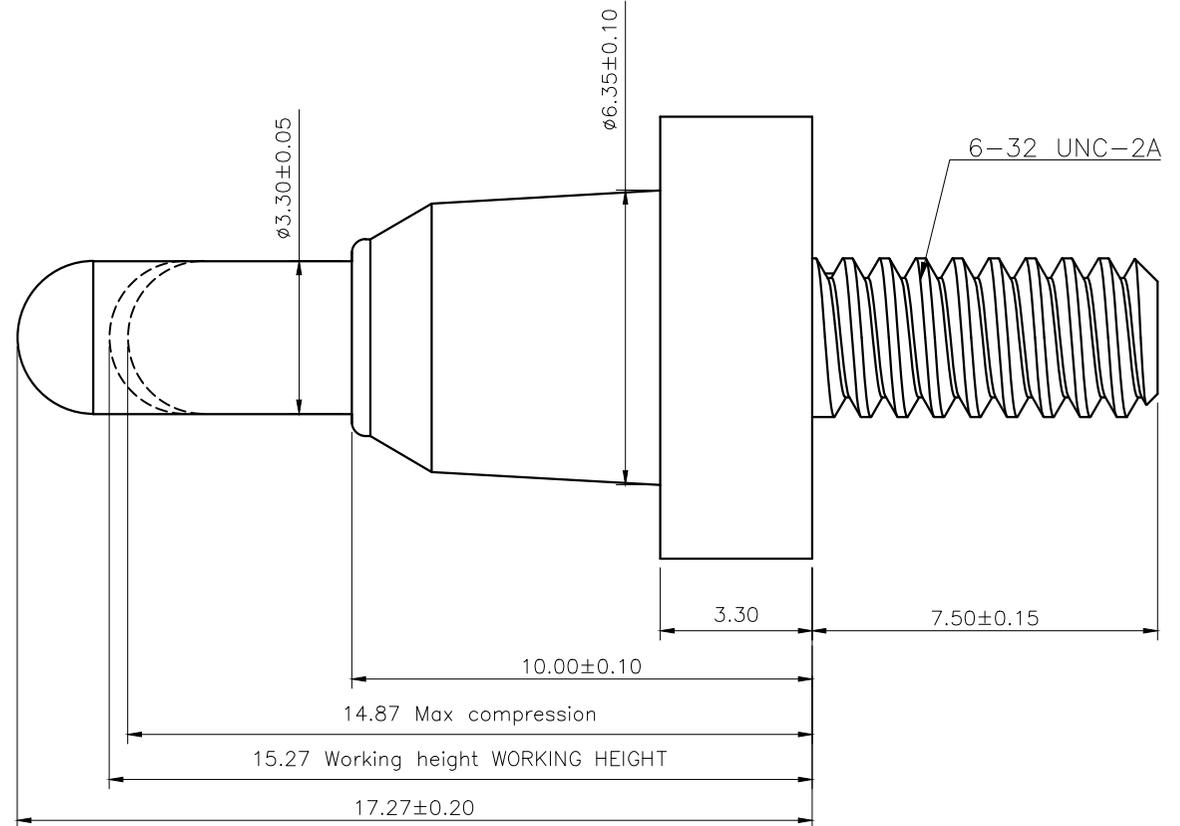


Please Approve this Drawing

Date

Signature

NO.	Part Name	Q'TY	Material	Plated surface
1	Plunger	1	C3604	AU 10 U" MIN OVER 50~100 U" NI
2	Barrel	1	C3604	AU 3 U" MIN OVER 50~100 U" NI
3	Spring	1	SUS304	N/A

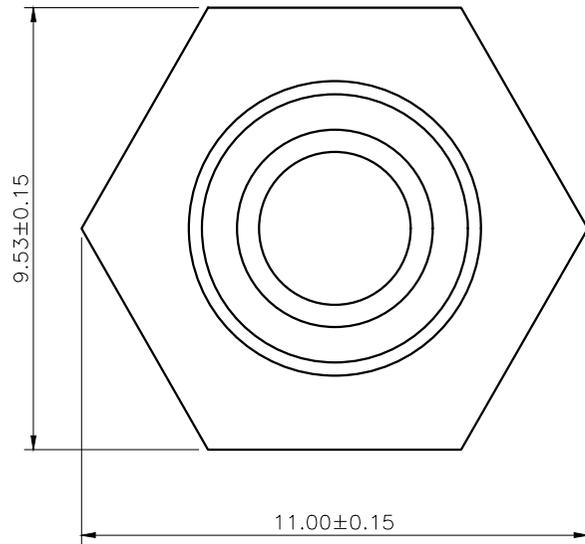

NOTES:

- Electrical
 - .Rated Current & Voltage : DC 30 V ; 5A MAX
 - .Contact Resistance: 30 mohm maximum at Working Height(Quiescence)
- Mechanical
 - .Full store: 2.40 mm
 - .Working Store: 2.00 mm
 - .Spring Force: PRE-LOAD 128gf±15gf and 225gf±15gf at Normal Working Height
 - .Durability:10,000 cycles(minimum)
- Environmental
 - .Operating Temperature: -35°C~+105°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
- When the current is greater than 1A then need to increase the time delay circuit(3 second)
- To avoid arcing issue, The adaptor start to power supply after connector mated fully.
- To ensure the best usage,please operate it based on the working height.
- .RoHs&HF compliant product.

DRAWN	Tony	DATE	2019.05.31		
CHECKED		SCALE	10:1	VER. B.0	
APPROVED		TITLE	Pogo pin		Ang:
PROJECT		DRAWING NO.	C1227-01		0 ±1°
SHEET	1 of 1	UNIT	mm		.0 ±0.5°
					.00 ±0.25°
					Dim: 0 ±0.15
					.0 ±0.10
					.00 ±0.05