


Please Approve this Drawing

Date


Signature

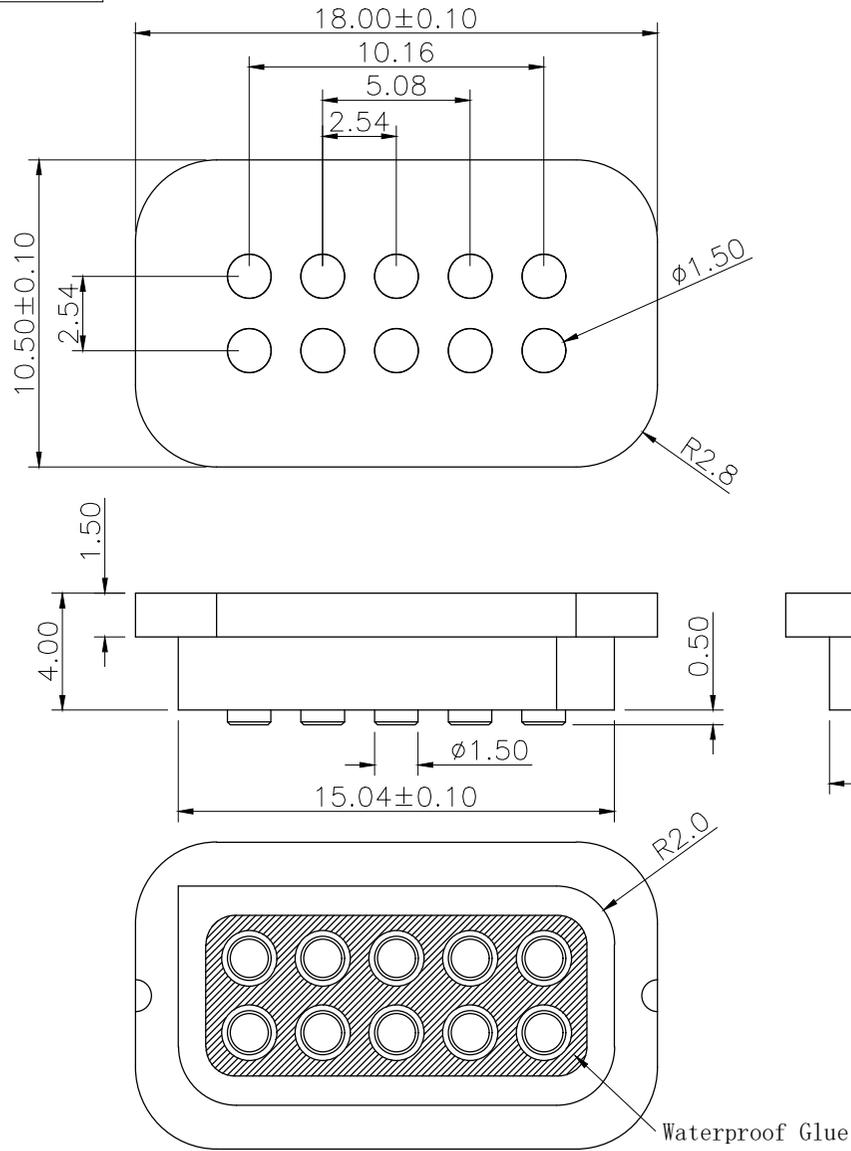

NO.	Part Name	Q'TY	Material	Plated surface
1	Pin	10	Brass	Au 5u" Min. Over 50u" Min. Ni
2	Housing	1	High temp.Plastic; UL94 V-0 Color Black	
3				
4				
5				

NOTES:

1. Electrical
 - .Rated Current & Voltage : DC 30 V ; 2.0A
 - .Contact Resistance:50 mohm maximum at Working Height(Quiescence)
 - .Insulation Resistance: 1000MΩ Min. at 1000VDC/Minute
 - .Dielectric Withstanding Voltage: At 500VAC/Minute No Breakdown
2. Environmental
 - .Operating Temperature: -20°C~+80°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
 - .Dustproof and waterproof: IP66
3. RoHs&HF compliant product.

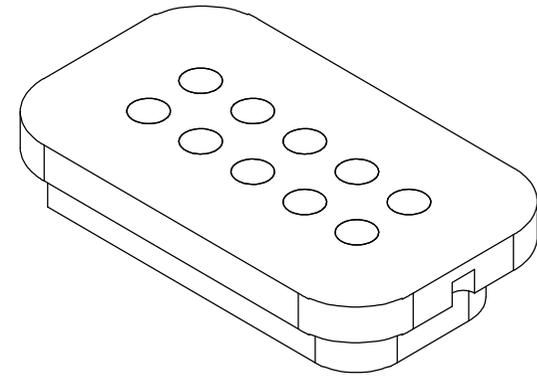

DRAWN	lys	DATE	2020.01.15				Dongguan Promax Electronics Technology Co., Ltd	
CHECKED		SCALE	10:1	VER.	B.0			
APPROVED		TITLE	pogo pin connector.			Ang:	Dim:	
PROJECT		DRAWING NO.	F1567-10			0 ±1°	0 ±0.15	
SHEET	1 of 1	UNIT	mm			.0 ±0.5°	.0 ±0.10	
						.00 ±0.25°	.00 ±0.05	

VER.	DESCRIPTION	ECN NO.	DATE