
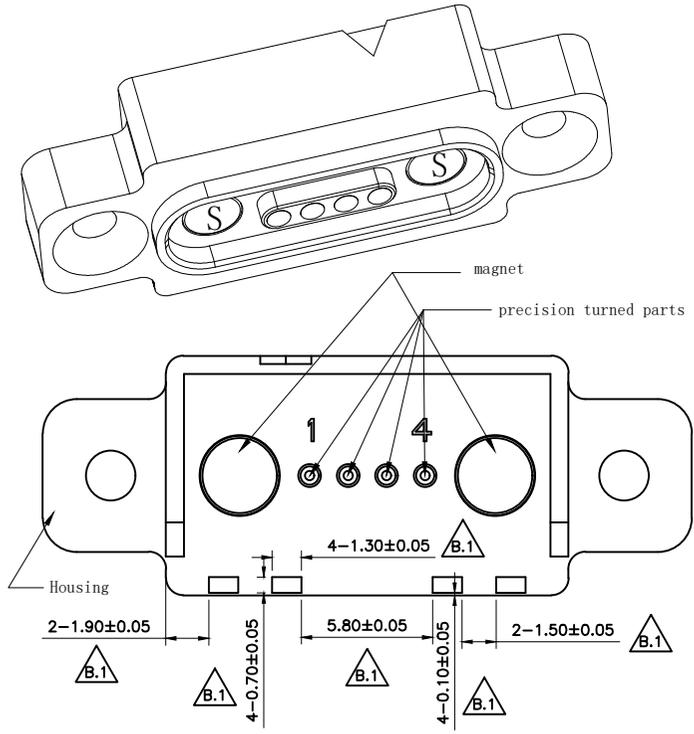
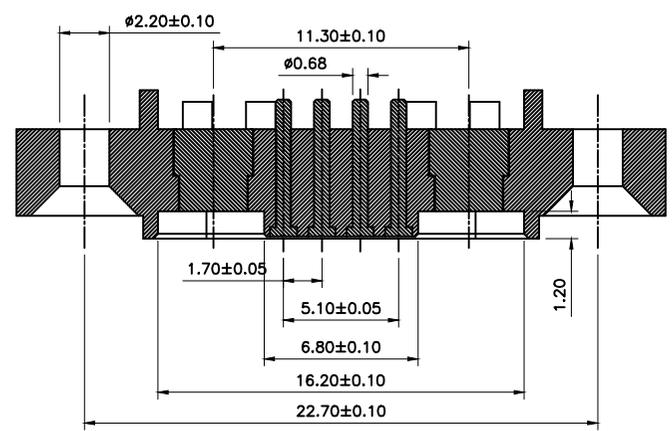

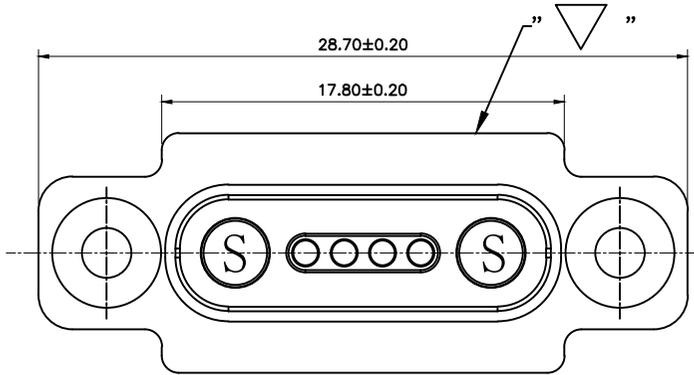


Please Approve this Drawing

Date _____

Signature _____

NO.	Part Name	Q'TY	Material	Plated surface
1	Pin	4	C5191	Au 15u" Min. Over 120~200u" Ni
2	Housing	1	PA9T	UL 94V-0, Black
3	Magnet	2	NdFeB N52	80~180u" Ni

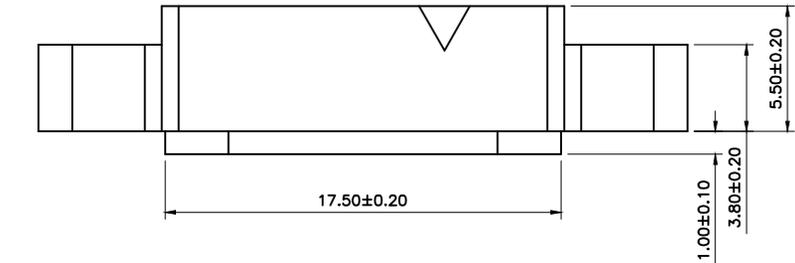

- NOTES:
- Electrical
 - .Rated Current & Voltage : DC 12 V ; 1 A
 - .Contact Resistance: 30 mohm maximum at Working Height(Quiescence)
 - Environmental
 - .Operating Temperature: -25°C~+85°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
 - .RoHs&HF compliant product.

DRAWN	Kevin	DATE	2021.12.06		
CHECKED		SCALE	10:1	VER. B.1	
APPROVED		TITLE	pogo pin connector.		Ang:
PROJECT		DRAWING NO.	F708-04PB		0 ±1°
SHEET	1 of 1	UNIT	mm		.0 ±0.15
					.0 ±0.10
					.00 ±0.05

VER.	DESCRIPTION	ECN NO.	DATE
B.1		ECN-2021120601	2021.12.06
B.0	NEW RELEASE	ECN-2020121801	2020.12.18