
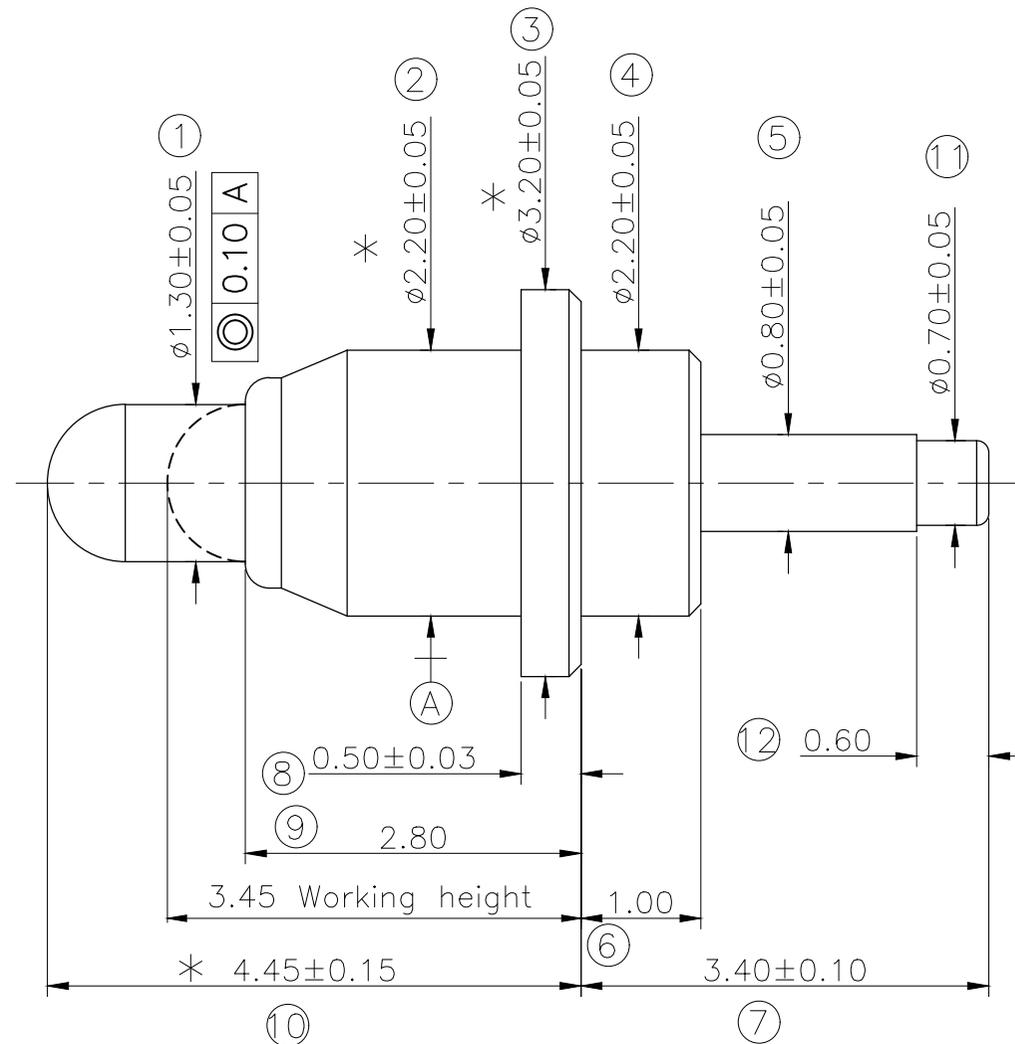


Please Approve this Drawing

Date

Signature

NO.	Part	QTY	Material	Plated surface
1	Plunger	1	Lead-free Brass	AU 3u" MIN OVER 50~120u" NI
2	Barrel	1	Lead-free Brass	AU 3u" MIN OVER 50~120u" NI
3	Spring	1	SUS304	/

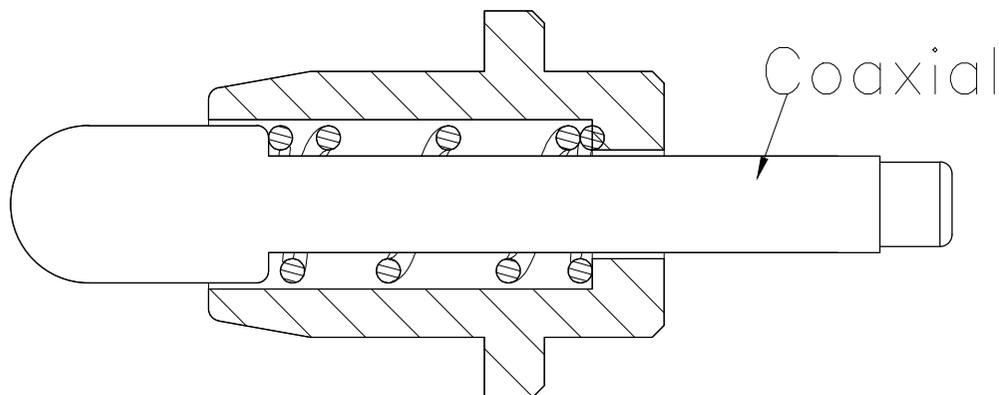

NOTES:

- Material:  
Barrel: Lead free brass HBi59-1.5 , salt spray 48H (NSS)  
3U" Au plated.  
Plunger: Lead free brass HBi59-1.5 , salt spray 48H (NSS)  
3U" Au plated.  
Spring: SUS304
- Electrical  
.Rated Current & Voltage : DC 12 V ; 5A  
.Contact Resistance: 50 mohm maximum  
at Working Height(Quiescence)
- Mechanical  
.Spring Force :70g±10g at Working Height  
.Durability:100,000 cycles(minimum)
- Coaxial Pogo pin.
- "\*"Mark is major dimension.
- RoHS2.0, REACH compliant product.

DRAWN	LX	DATE	2020.10.10				Dongguan Promax Electronics Technology Co., Ltd	
CHECKED		SCALE	10:1	VER.	B.0			
APPROVED		TITLE	pogo pin			Ang:	Dim:	
PROJECT		DRAWING NO.	NC2363-01			0 ±1°	0 ±0.15	
SHEET	1 of 1	UNIT	mm			.0 ±0.5°	.0 ±0.10	
					.00 ±0.25°	.00 ±0.05		

VER.	DESCRIPTION	ECN NO.	DATE
B.0	Initial release	ECN-20201010-4	2020.10.10