
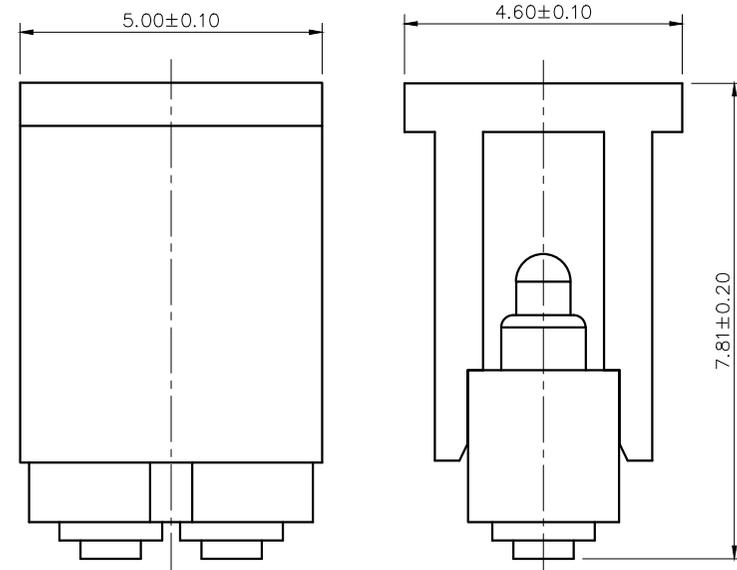
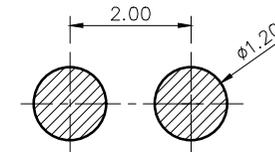


Please Approve this Drawing

Date

Signature

NO.	Part Name	Q'TY	Material	Plated surface
1	Plunger	2	Brass	AU 3 U" MIN OVER 50~120 U" NI
2	Barrel	2	Brass	AU 3 U" MIN OVER 50~120 U" NI
3	Spring	2	SUS304	Not Plated
4	Housing	1	High temp.Plastic; UL94 V=0 Color Black	
5	CAP	1	High temp.Plastic; UL94 V=0 Color Black	

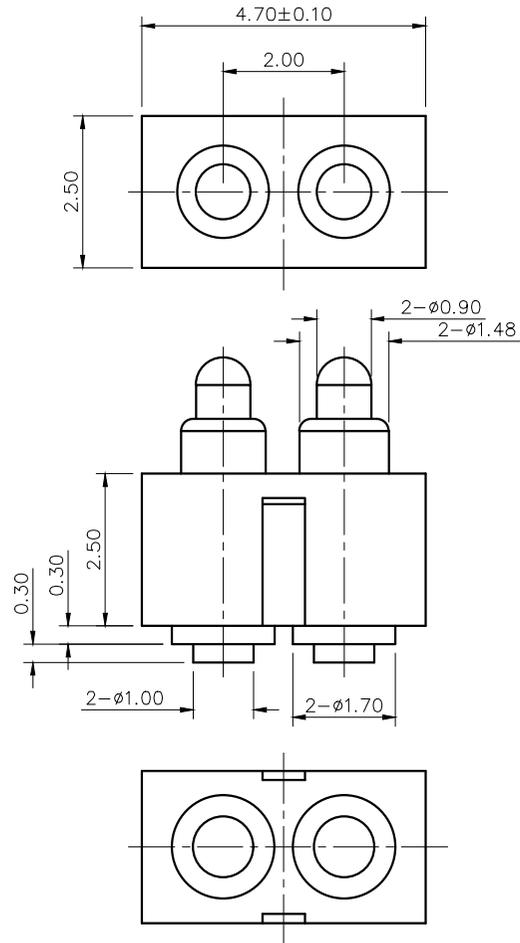

- Notes:
- Electrical
 - Rated Current&Voltage: DC 12V 3.0A
 - Contact Resistance: 50 mohm maximum at Working Height(quiescence)
 - Mechanical
 - Spring Force :85g±20g at Working Height
 - Durability: 10000 Cycles(minimum)
 - To ensure the best usage, please operate it based on the working Height
 - Based on the Engineering Drawings, shall not exceed the maximum allowed compression

DRAWN	lys	DATE	2021.03.06		
CHECKED		SCALE	10:1	VER. B.0	
APPROVED		TITLE	pogo pin connector.		Ang:
PROJECT		DRAWING NO.	NC2898-02RA		0 ±1°
SHEET	1 of 1	UNIT	mm		.0 ±0.5°
					.00 ±0.25°
					Dim:
					0 ±0.15
					.0 ±0.10
					.00 ±0.05

VER.	DESCRIPTION	ECN NO.	DATE