
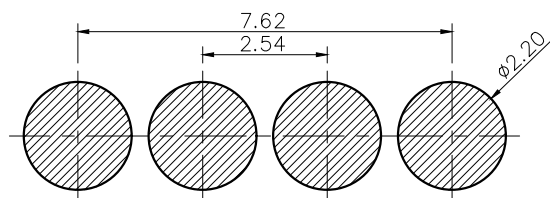
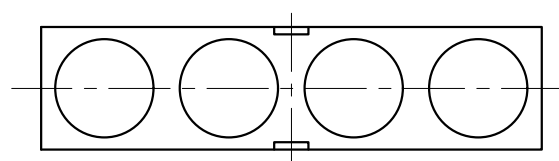

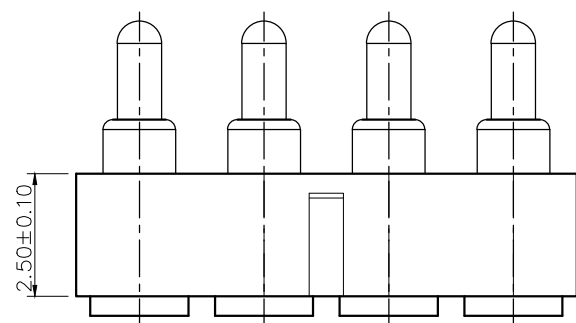


Please Approve this Drawing	
Date	
Signature	


NO.	Part Name	Q'TY	Material	Plated surface
1	Plunger	4	HBI59	Au 5u" Min. OVER 50U~120" Ni
2	Barrel	4	HBI59	Au 3u" Min. OVER 50U~120" Ni
3	Spring	4	SUS304	/
4	Housing&CAP	1	High temp.Plastic; UL94 V-0 Color Black	

NOTES:

- Electrical
 - .Rated Current & Voltage : DC 12 V ; 3.0A Max.
 - .Contact Resistance: 50 mohm maximum at Working Height(Quiescence)
- Mechanical
 - .Full store: 1.40 mm
 - .Spring Force : 50g±15g at Working Height
 - .Durability:100,000 cycles(minimum)
- Environmental
 - .Operating Temperature: -40°C~+85°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
- When the current is greater than 1A then need to increase the time delay circuit(3 second)
- To avoid arcing issue, The adaptor start to power supply after connector mated fully.
- To ensure the best usage,please operate it based on the working height.
- .RoHS&HF compliant product.

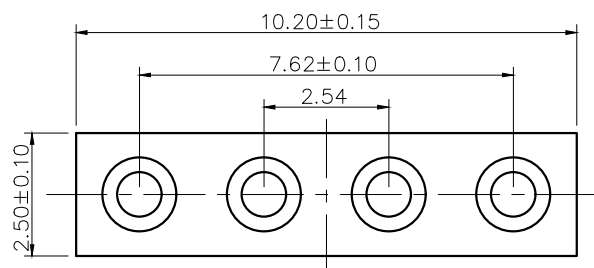

Recommended pcb layout
layout tolerance: ±0.05mm

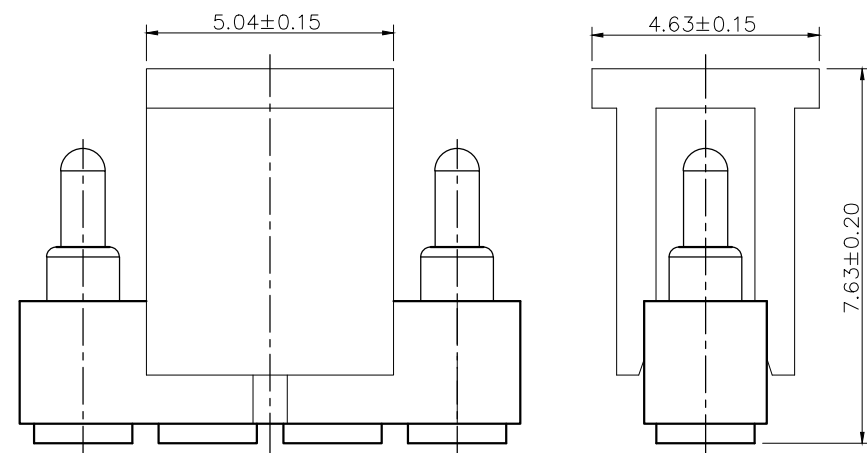

DRAWN	Iys	DATE	2021.05.11	 Dongguan Promax Electronics Technology Co., Ltd	
CHECKED		SCALE	10:1 VER. B.0		
APPROVED		TITLE	pogo pin	Ang:	Dim:
PROJECT		DRAWING NO.	NC3260-04RA	0 ±1°	0 ±0.15
SHEET	1 of 1	UNIT	mm	.0 ±0.5°	.0 ±0.10
				.00 ±0.25°	.00 ±0.05

VER.	DESCRIPTION	ECN NO.	DATE