
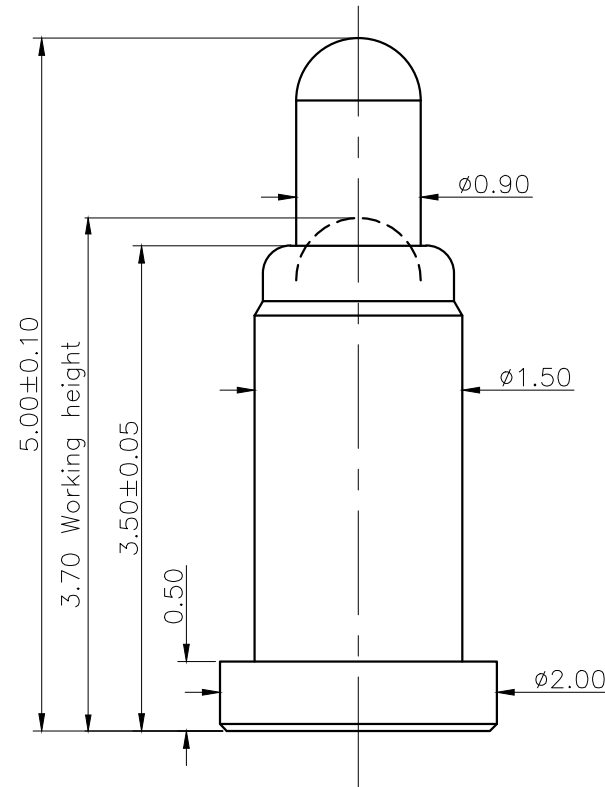


Please Approve this Drawing	
Date	
Signature	

NO.	Part Nome	Q'TY	Material	Plated surface
1	Plunger	1	Brass	Au 3 U" MIN OVER 50~120 U" NI
2	Barrel	1	Brass	Au 3 U" MIN OVER 50~120 U" NI
3	Spring	1	SUS304	Au 1U" MIN OVER NI
4	Cap	1	High temp.Plastic; UL94 V-0	Color Black

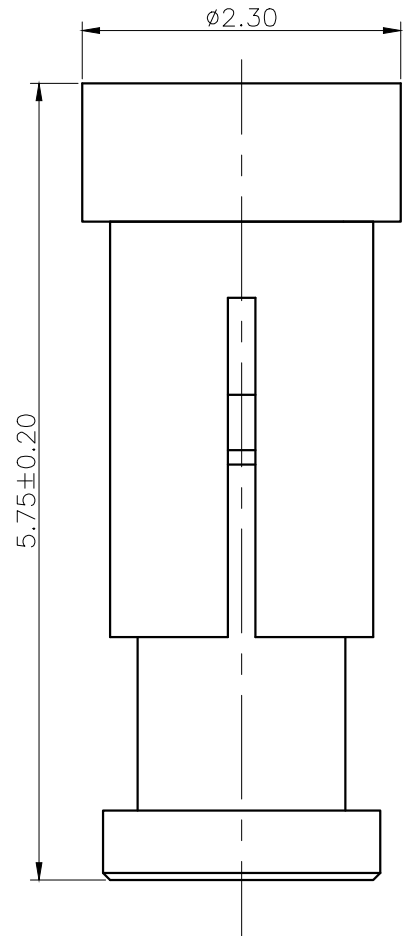

NOTES:

- Electrical
 - .Rated Current & Voltage : DC 12 V ; 1.0A Max.
 - .Contact Resistance: 100 mohm maximum at Working Height(Quiescence)
- Mechanical
 - .Full store: 1.50 mm
 - .Spring Force: 40±10gf at Normal Working Height
 - .Durability:10,000 cycles(minimum)
- Environmental
 - .Operating Temperature: -25°C~+85°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
- When the current is greater than 1A then need to increase the time delay circuit(3 second)
- To avoid arcing issue, The adaptor start to power supply after connector mated fully.
- To ensure the best usage,please operate it based on the working height.
- .RoHs&HF compliant product.

VER.	DESCRIPTION	ECN NO.	DATE
------	-------------	---------	------

DRAWN	lys	DATE	2021.07.17			 Dongguan Promax Electronics Technology Co., Ltd			
CHECKED		SCALE	10:1	VER.	A.0				
APPROVED		TITLE	pogo pin			Ang:		Dim:	
PROJECT		DRAWING NO.	NC3592-01RA			0 ±1°		0 ±0.15	
SHEET	1 of 1	UNIT	mm			.0 ±0.5°		.0 ±0.10	
						.00 ±0.25°		.00 ±0.05	