
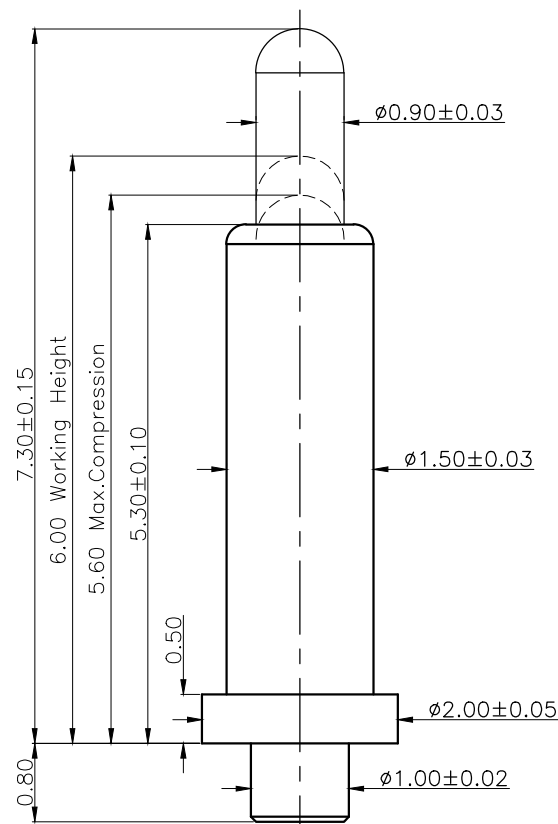


Please Approve this Drawing	
Date	
Signature	

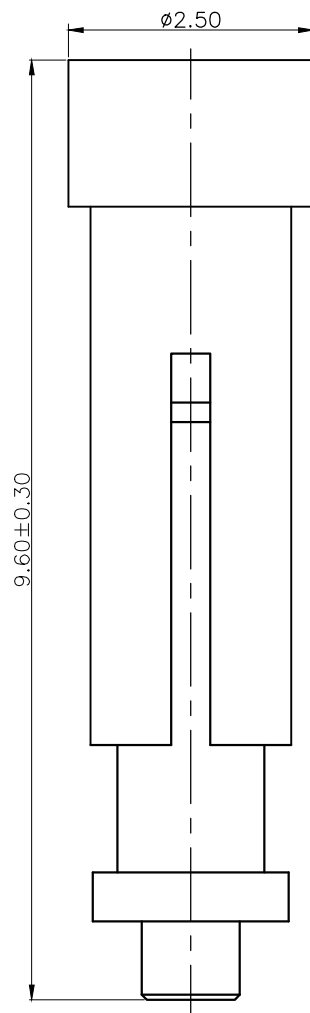

NO.	Part Name	Q'TY	Material	Plated surface
1	Plunger	1	HBi59	Au 3u" Min. OVER 50~100 U" NI
2	Barrel	1	HBi59	Au 3u" Min. OVER 50~100 U" NI
3	Spring	1	SUS 304	Au 1u" Min. OVER NI
4	CAP	1	High temp.Plastic; UL94 V-0	Color Black

NOTES:

- Electrical
 - .Rated Current & Voltage : DC 12 V ; 1.0A
 - .Contact Resistance: 100 mohm maximum at Working Height(Quiescence)
- Mechanical
 - .Full store: 1.70 mm
 - .Working Store: 1.30 mm
 - .Spring Force: 25gf±5gf at Working Height
 - .Durability:10,000 cycles(minimum)
- Environmental
 - .Operating Temperature: -25°C~+85°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
- When the current is greater than 1A then need to increase the time delay circuit(3 second)
- To avoid arcing issue, The adaptor start to power supply after connector mated fully.
- To ensure the best usage, please operate it based on the working height.
- .RoHs&HF compliant product.

DRAWN	LX	DATE	2021.08.04	 Dongguan Promax Electronics Technology Co., Ltd	
CHECKED		SCALE	10:1 VER. A.0		
APPROVED		TITLE	JVC-192B	Ang:	Dim:
PROJECT		DRAWING NO.	NC3649-01RA	0 ±1°	0 ±0.15
SHEET	1 of 1	UNIT	mm	.0 ±0.5°	.0 ±0.10
				.00 ±0.25°	.00 ±0.05

VER.	DESCRIPTION	ECN NO.	DATE