


Please Approve this Drawing

Date

Signature

| NO. | Part Name | Q'TY | Material | Plated surface | |
|-----|-----------|---------|----------|----------------|-------------------------------|
| B.0 | 1 | Plunger | 1 | HBI59 | Au 4u" Min. OVER 56U" Min. NI |
| 2 | | | | | |
| 3 | | | | | |
| 4 | | | | | |

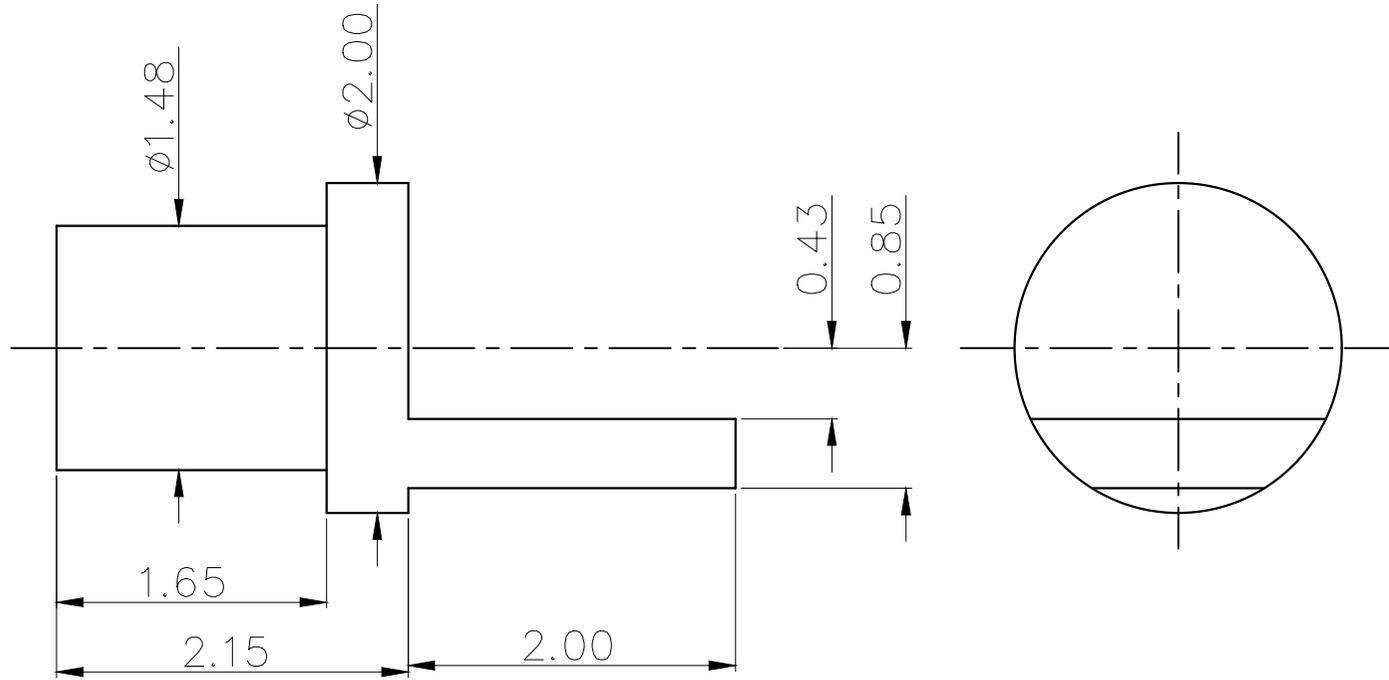

NOTES:

1. Electrical
 - .Rated Current & Voltage : DC 12 V ; 1A
 - .Contact Resistance: 30 mohm maximum (Quiescence)
2. Environmental
 - .Operating Temperature: -40°C~+85°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
3. RoHs&HF compliant product.

| | | | | | | |
|----------|---|-------------|-------------|------|-----|---|
| DRAWN | Kevin | DATE | 2021.07.09 | | |  Dongguan Promax Electronics Technology Co., Ltd |
| CHECKED | | SCALE | 10:1 | VER. | B.0 | |
| APPROVED | | TITLE | Plunger | | | Ang: |
| PROJECT |  | DRAWING NO. | NF1982-01RB | | | 0 ±1° |
| SHEET | 1 of 1 | UNIT | mm | | | .0 ±0.5° |
| | | | | | | .00 ±0.25° |
| | | | | | | Dim: 0 ±0.15 |
| | | | | | | .0 ±0.10 |
| | | | | | | .00 ±0.05 |

| | | | |
|------|----------------|------------|----------|
| B.0 | | | 20210709 |
| VER. | DESCRIPTION() | ECN NO.() | DATE() |