


Please Approve this Drawing

Date




Signature

N0.	Part Name	Q'TY	Material	Plated surface
1	Pin	7	Brass	Au 10u" Min. Over 50~120u" Ni
2	Housing	1	High temp.Plastic; UL94 V-0	Color Gray 7C B.1
3				
4				
5				

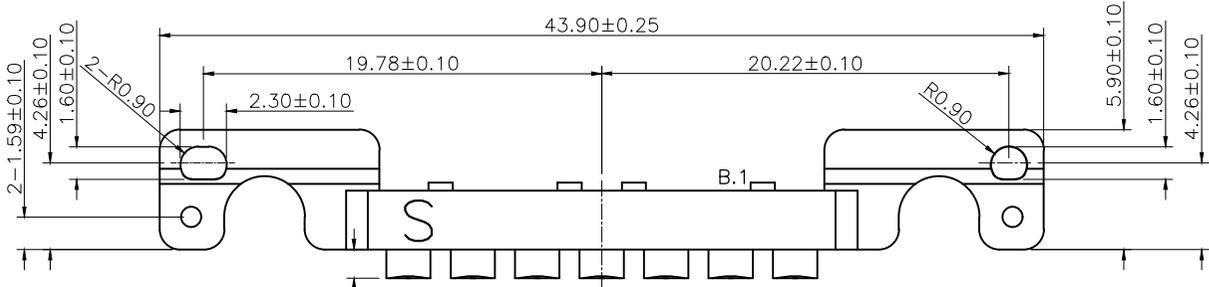


NOTES:

- Electrical
 - .Rated Current & Voltage : DC 12 V ; 1.0A
 - .Contact Resistance:50 mohm maximum at Working Height(Quiescence)
- Environmental
 - .Operating Temperature: -20°C~+80°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
- RoHs&HF compliant product.

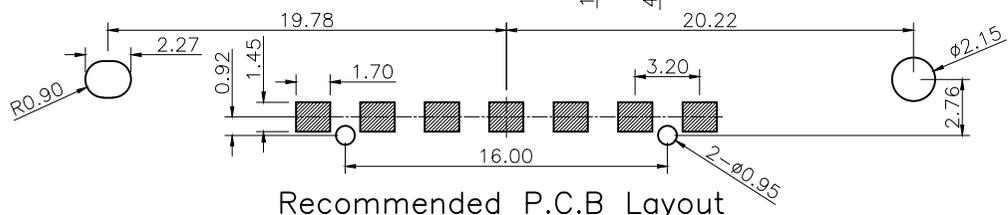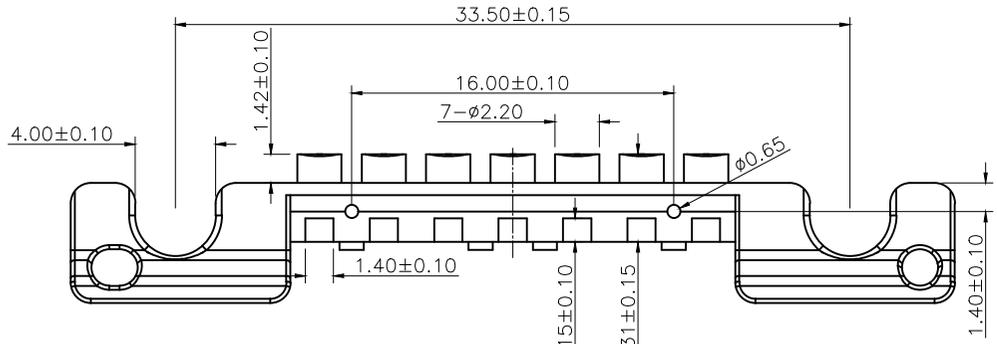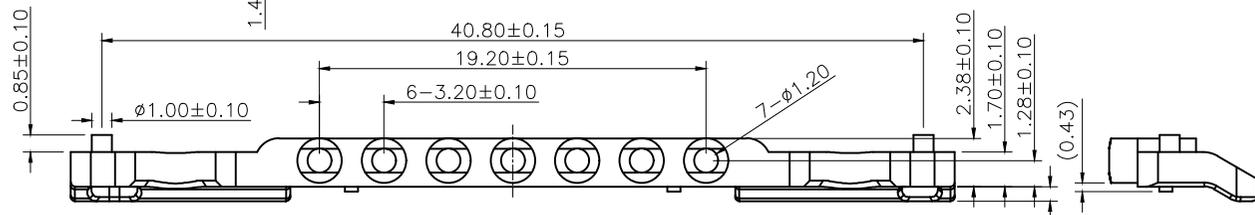

Recommended P.C.B Layout
Tolerance: ±0.05

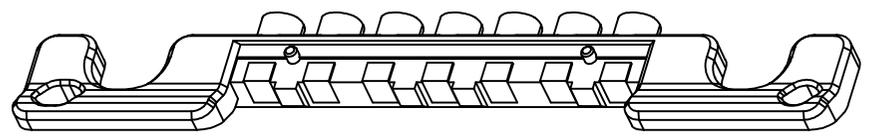

DRAWN	lys	DATE	2021.01.28		 Dongguan Promax Electronics Technology Co., Ltd
CHECKED		SCALE	10:1	VER. B.1	
APPROVED		TITLE	pogo pin connector.		Ang:
PROJECT		DRAWING NO.	NF2042-07RA		0 ±1°
SHEET	1 of 1	UNIT	mm		.0 ±0.5°
					.00 ±0.25°
					Dim: 0 ±0.15
					.0 ±0.10
					.00 ±0.05

VER.	DESCRIPTION	ECN NO.	DATE