
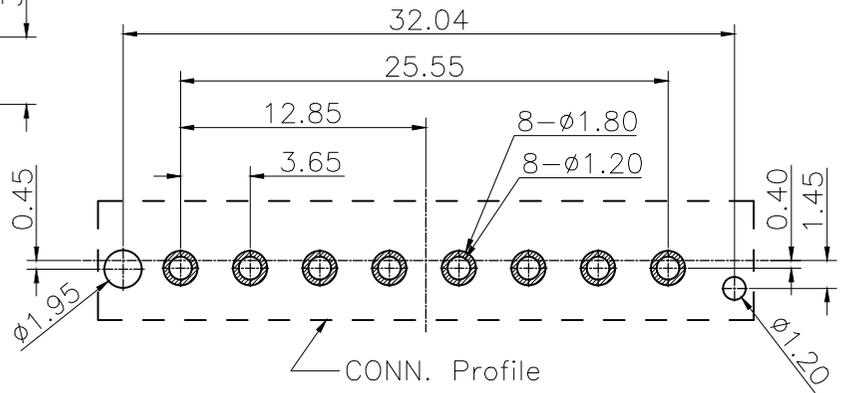

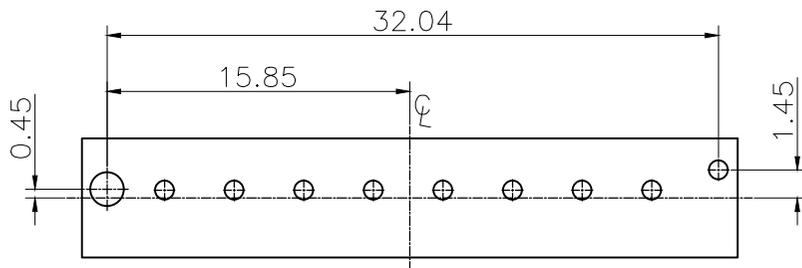
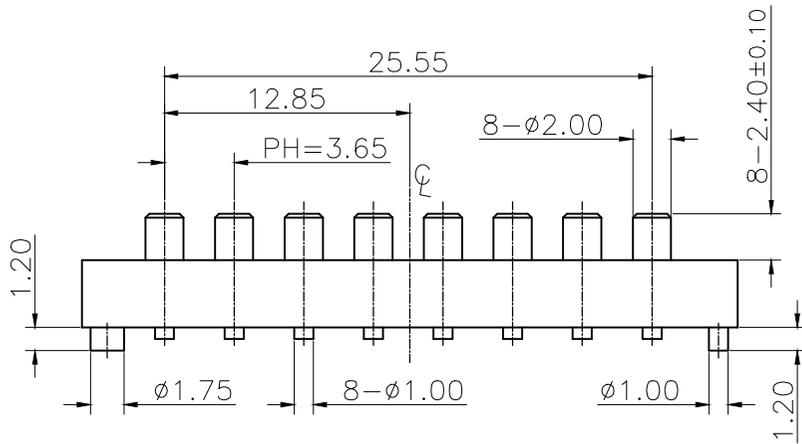


Please Approve this Drawing

Date

Signature

NO.	Part Name	Q'TY	Material	Plated surface
1	PIN	8	HB159	Au 5u" Min. OVER 50~120 U" NI
2	HOUSING	1	High Temperature Plastics (Color:Black)	
3				
4				

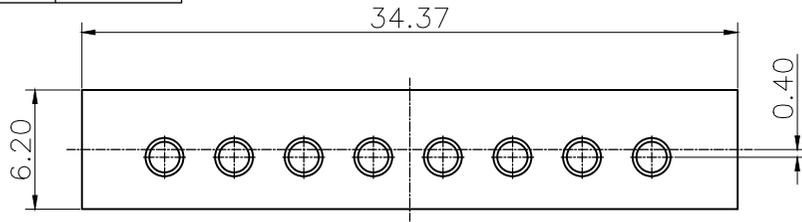

RECOMMEND PCB LAYOUT (TOP VIEW)
TOLERANCE ±0.05mm

NOTES:

- Electrical
 - .Rated Current & Voltage : DC 12 V ; 1.0A
 - .Contact Resistance:50 mohm maximum (Quiescence)
- Environmental
 - .Operating Temperature: -30°C~+85°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
- RoHs&HF compliant product.

DRAWN	Kevin	DATE	2022.02.22		 Dongguan Promax Electronics Technology Co., Ltd
CHECKED		SCALE	10:1	VER. A.0	
APPROVED		TITLE	8P_CONNECTOR		Ang:
PROJECT		DRAWING NO.	NF3799-08PA		0 ±1°
SHEET	1 of 1	UNIT	mm		.0 ±0.5°
					.00 ±0.25°
					Dim: 0 ±0.20
					.0 ±0.15
					.00 ±0.10

VER.	DESCRIPTION	ECN NO.	DATE