
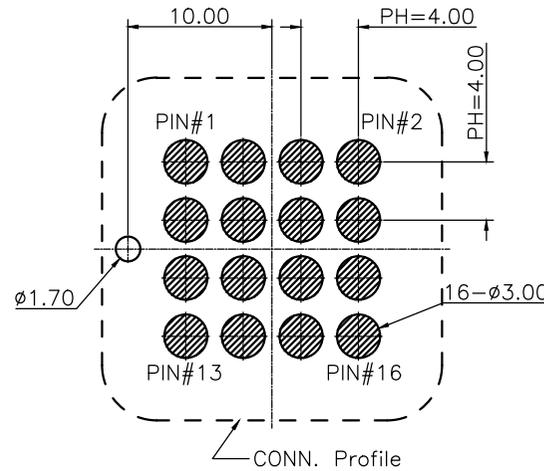



Please Approve this Drawing

Date	
Signature	

NO.	Part Name	Q'TY	Material	Plated surface
1	PIN	16	HBi59	Au 5u" Min. OVER 50~120 U" NI
2	HOUSING	1	High Temperature Plastics (Color:Black)	
3				
4				

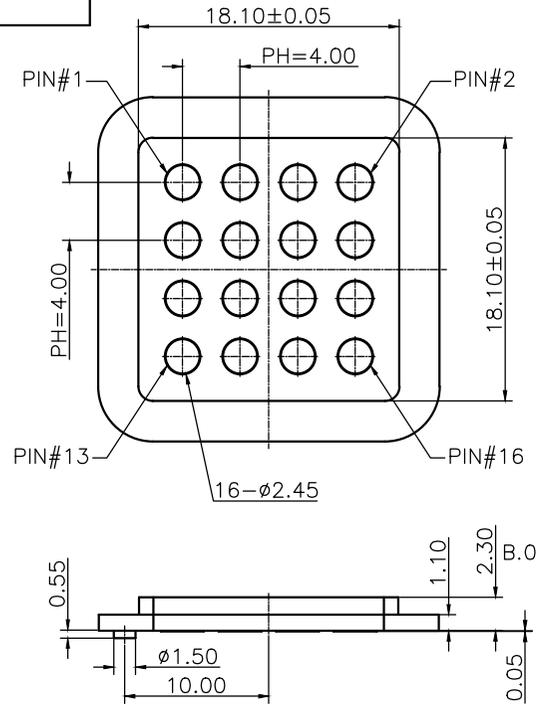


RECOMMEND PCB LAYOUT (TOP VIEW)
TOLERANCE ±0.05mm

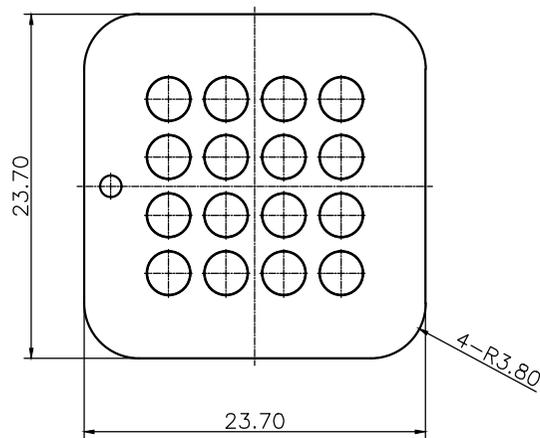

NOTES:

- Electrical
 - .Rated Current & Voltage : DC 12 V ; 1.0A
 - .Contact Resistance:50 mohm maximum (Quiescence)
- Environmental
 - .Operating Temperature: -30°C~+85°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
- RoHs&HF compliant product.

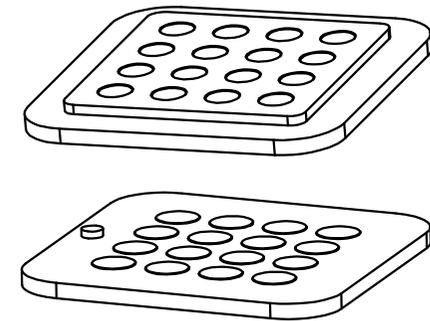

DRAWN	WXH	DATE	2022.02.22				Dongguan Promax Electronics Technology Co., Ltd	
CHECKED		SCALE	10:1	VER.	c.0			
APPROVED		TITLE	16P_CONNECTOR			Ang:	Dim:	
PROJECT		DRAWING NO.	NF3800-16RC			0 ±1°	0 ±0.20	
SHEET	1 of 1	UNIT	mm			.0 ±0.5°	.0 ±0.15	
						.00 ±0.25°	.00 ±0.10	

B.0		ECN20211120001	2021.11.20
A.0	NEW	ECN20210915001	2021.09.15
VER.	DESCRIPTION	ECN NO.	DATE