


Please Approve this Drawing

Date

Signature

NO.	Part Name	Q'TY	Material	Plated surface
1	Plunger	1	C3604	Au 30u" Min. OVER 50~100 U" NI
2	Barrel	1	C3602	Au 10u" Min. OVER 50~100 U" NI
3	Spring	1	SUS 304	Au 1u" Min. OVER 50~100 U" NI
4	Ball	1	Brass	Au 10u" Min. OVER 50~100 U" NI

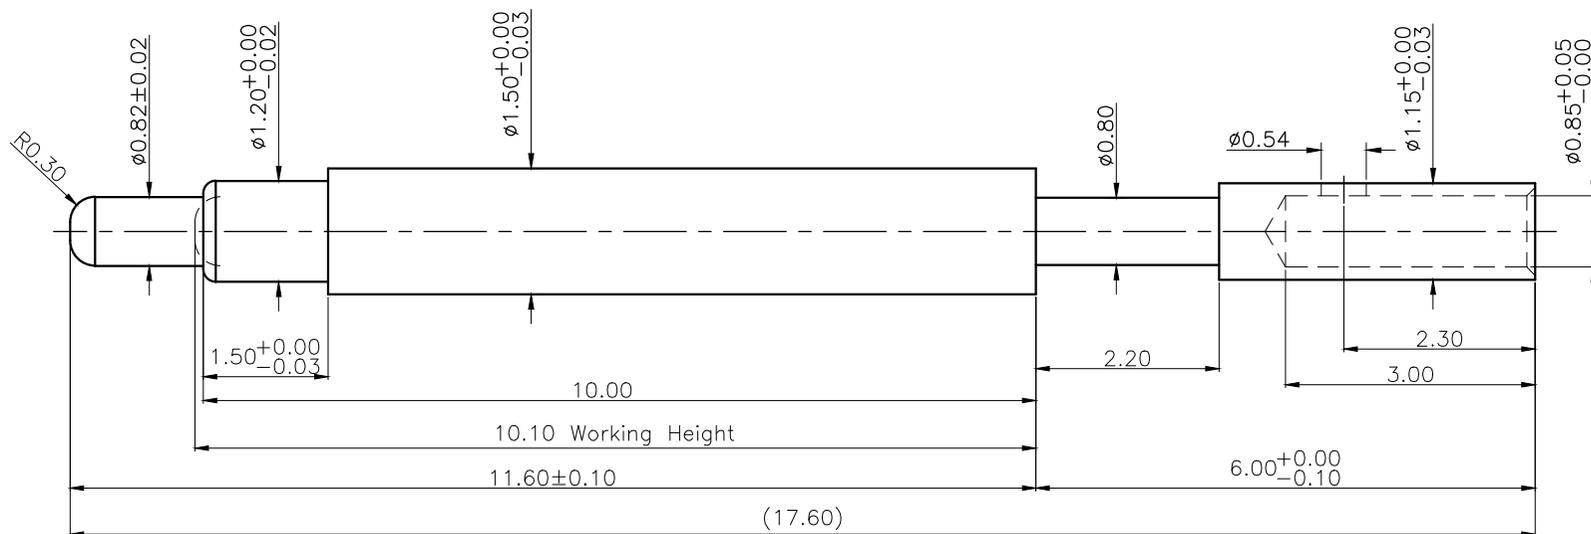

NOTES:

- Electrical
 - .Rated Current & Voltage : DC 12 V ; 5.0A
 - .Contact Resistance: 50 mohm maximum at Working Height(Quiescence)
- Mechanical
 - .Full store: 1.60 mm
 - .Working Store: 1.50 mm
 - .Spring Force: 100gf±20gf at Normal Working Height
 - .Durability:10,000 cycles(minimum)
- Environmental
 - .Operating Temperature: -25°C~+85°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
- When the current is greater than 1A then need to increase the time delay circuit(3 second)
- To avoid arcing issue, The adaptor start to power supply after connector mated fully.
- To ensure the best usage, please operate it based on the working height.
- RoHs&HF compliant product.

Z1316-0130A
 K1316-1110A
 T1316-1A
 ø0.90铜球

DRAWN	lys	DATE	2019.08.09			 Dongguan Promax Electronics Technology Co., Ltd
CHECKED		SCALE	10:1	VER.	B.0	
APPROVED		TITLE	pogo pin connector.			Ang:
PROJECT		DRAWING NO.	C1316-01			0 ±1°
SHEET	1 of 1	UNIT	mm			.0 ±0.5°
						.00 ±0.25°
						Dim: 0 ±0.15
						.0 ±0.10
						.00 ±0.05

VER.	DESCRIPTION	ECN NO.	DATE