


Please Approve this Drawing	
Date	
Signature	

NO.	Part Name	Q'TY	Material	Plated surface
1	Plunger	1	C3604	Ni 80~150u"
2	Barrel	1	C3604	Ni 80~150u"
3	Ring	1	SUS	N/A
4	Spring	1	SUS	N/A

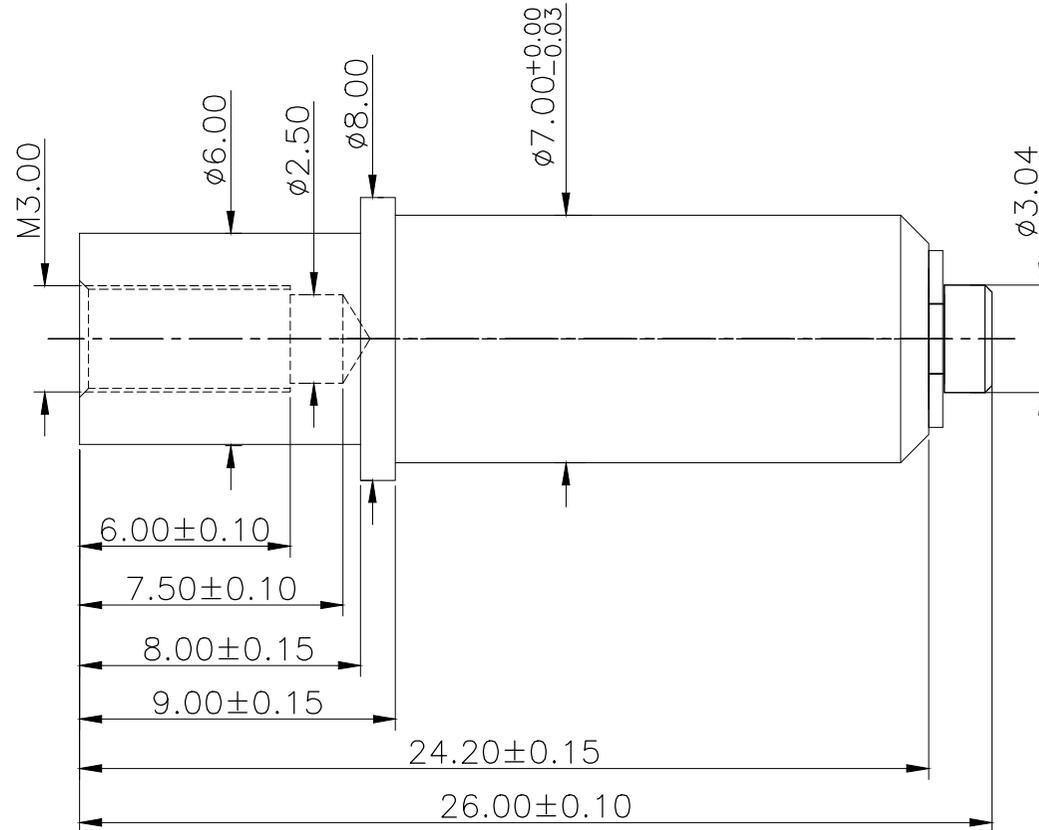

NOTES:

- Mechanical
 - .Max Compression: 7.90 mm
 - .Working Stroke: 4.00 mm
 - .Spring Force: 20N±10% at Working Stroke
 - .Durability:30,000 cycles(minimum) at Working Stroke
- Environmental
 - .Operating Temperature: -25°C~+85°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
- To ensure the best usage, please operate it based on the working height.

B.0		ECN-20200915-3	20200915
VER.	DESCRIPTION	ECN NO.	DATE

DRAWN	Tony	DATE	2020.09.09		 Dongguan Promax Electronics Technology Co., Ltd
CHECKED		SCALE	10:1	VER. B.0	
APPROVED		TITLE	Pogo pin		Ang:
PROJECT		DRAWING NO.	C2279-01		0 ±1°
SHEET	1 of 1	UNIT	mm		.0 ±0.5°
					.00 ±0.25°
					Dim: 0 ±0.20
					.0 ±0.15
					.00 ±0.10