


Please Approve this Drawing	
Date	
Signature	

NO.	Part Name	Q'TY	Material	Plated surface
1	Plunger	1	HBI59	Au 5u" Min. OVER 50~120 U" NI
2	Barrel	1	HBI59	Au 5u" Min. OVER 50~120 U" NI
3	Spring	1	SUS 304	/
4	O-Ring	1	硅胶	颜色: Black

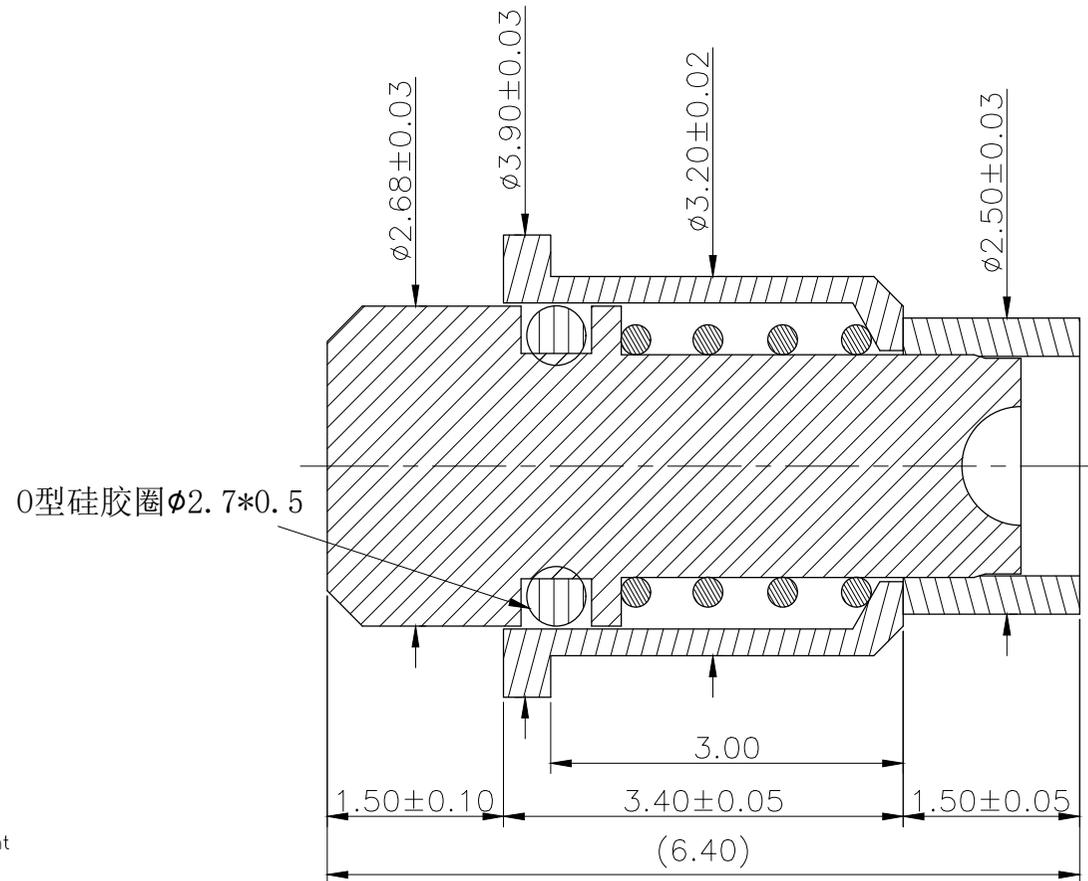

NOTES:

- Electrical
 .Rated Current & Voltage : DC 12 V ; 18A
 .Contact Resistance: 20 mohm maximum at Working Height(Quiescence)
- Mechanical
 .Full store: 1.20 mm
 .Working Store: 1.00 mm
 .Spring Force: 150gf±20%gf at Working Height
 .Durability:50,000 cycles(minimum)
- Environmental
 .Operating Temperature: -30°C~+85°C
 .Humidity Range: 10%RH~90%RH
- When the current is greater than 1A then need to increase the time delay circuit(3 second)
- To avoid arcing issue, The adaptor start to power supply after connector mated fully.
- To ensure the best usage, please operate it based on the working height.
- .RoHs&HF compliant product.

DRAWN	lys	DATE	2021.07.22		
CHECKED		SCALE	10:1	VER. A.0	
APPROVED		TITLE	pogo pin		Ang:
PROJECT		DRAWING NO.	NC3602-01PA		0 ±1°
SHEET	1 of 1	UNIT	mm		.0 ±0.5°
					.00 ±0.25°
					Dim:
					0 ±0.15
					.0 ±0.10
					.00 ±0.05

VER.	DESCRIPTION	ECN NO.	DATE