
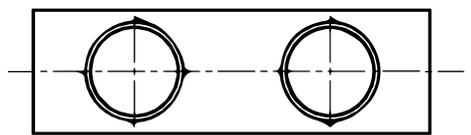
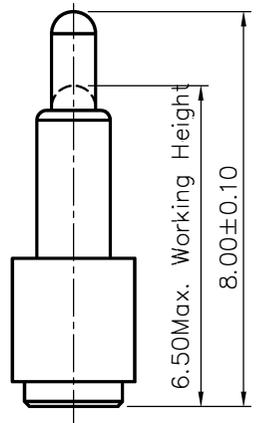
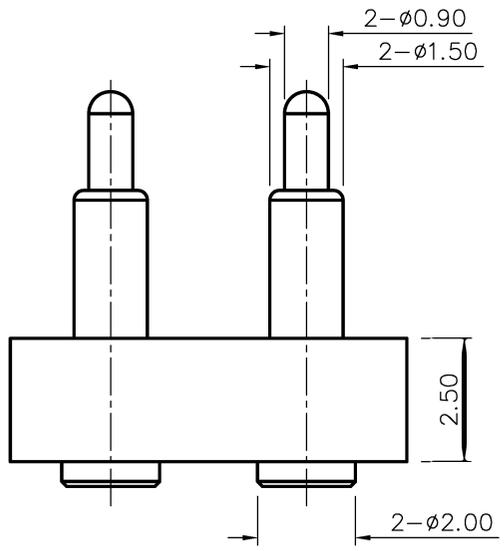


Please Approve this Drawing	
Date	
Signature	

NO.	Part Name	Q'TY	Material	Plated surface
1	Plunger	2	C3604	AU 10 U" MIN OVER 50~100 U" NI
2	Barrel	2	C3604	AU 10 U" MIN OVER 50~100 U" NI
3	Spring	1	SUS304	Not Plated
4	Housing	1	HTN	Not Plated

Notes:

1. Electrical
 - Rated Current & Voltage: DC 12V 2A
 - Contact Resistance: 50 mohm maximum at Working Height (quiescence)
2. Mechanical
 - Spring Force : 100g ± 20% at Working Height
 - Durability: 10000 Cycles (minimum)
3. To ensure the best usage, please operate it based on the working Height
 - Based on the Engineering Drawings, shall not exceed the maximum allowed compression

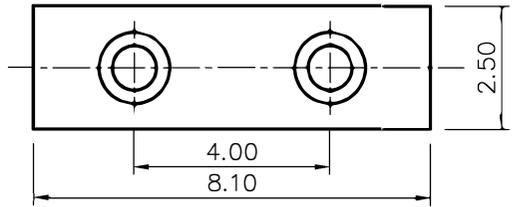

DRAWN	Ant	DATE	2014.08.22		 Dongguan Promax Electronics Technology Co., Ltd
CHECKED		SCALE	10:1	VER. B.0	
APPROVED		TITLE	pogo pin connector.		Ang:
PROJECT		DRAWING NO.	C071-02		0 ±1°
	1	UNIT	mm		.0 ±0.5°
					.00 ±0.25°
					Dim: 0 ±0.15
					.0 ±0.10
					.00 ±0.05

VER.	DESCRIPTION	ECN NO.	DATE