


Please Approve this Drawing

Date

Signature

NO.	Part Name	Q'TY	Material	Plated surface
1	Plunger	1	C3604	AU 10 U" MIN OVER 50~100 U" NI
2	Barrel	1	C3604	AU 5 U" MIN OVER 50~100 U" NI
3	Spring	1	SUS304	Not Plated
4				

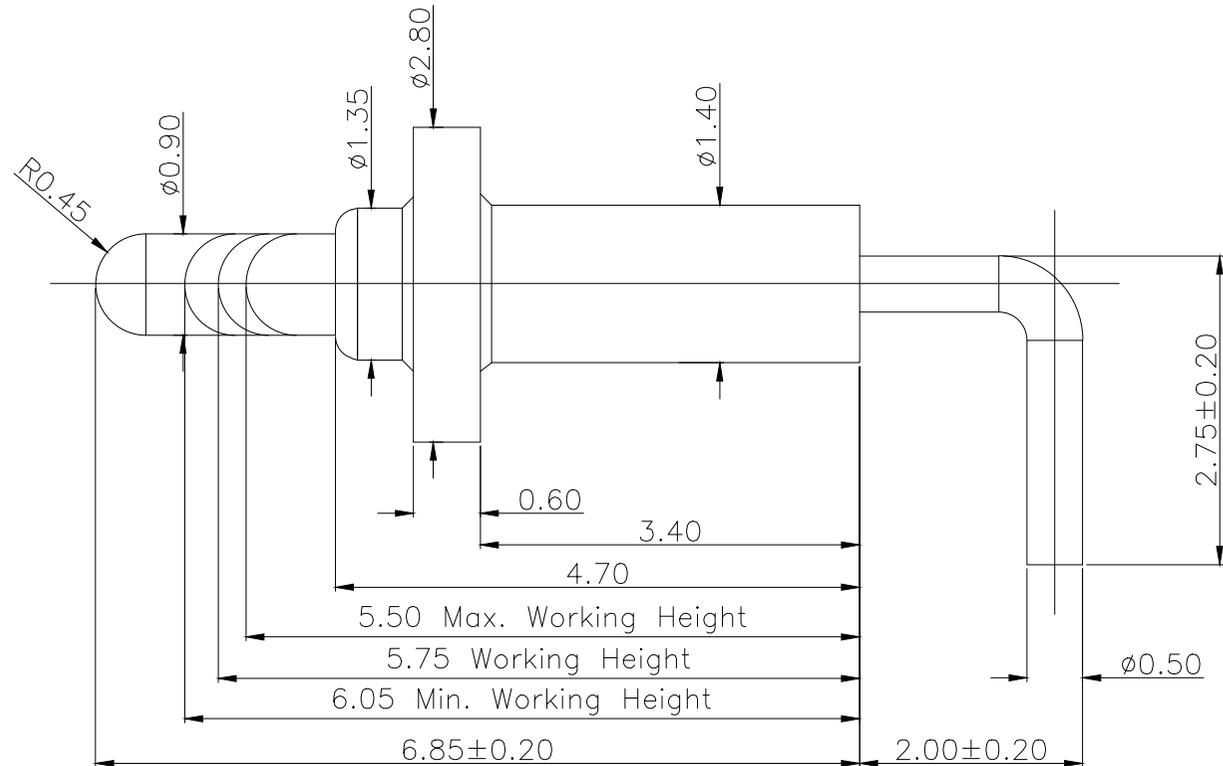

NOTES:

- Electrical
 - .Rated Current & Voltage : DC 12 V ; 2A
 - .Contact Resistance: 50 mohm maximum at Working Height(Quiescence)
- Mechanical
 - .Full store: 1.70 mm
 - .Working Store: 1.10 mm
 - .Spring Force: 80g \pm 20gf at Normal Working Height
 - .Durability:10,000 cycles(minimum)
- Environmental
 - .Operating Temperature: -25°C~+85°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
- Part To Be Free Form Manufacturing Lubricants.
- When the current is greater than 1A then need to increase the time delay circuit(3 second)
- To avoid arcing issue, The adaptor start to power supply after connector mated fully.
- To ensure the best usage, please operate it based on the working height.
- .RoHs&HF compliant product.

DRAWN	Roy	DATE	2015.10.24			 Dongguan Promax Electronics Technology Co., Ltd
CHECKED		SCALE	10:1	VER.	B.0	
APPROVED		TITLE	Pogo pin			Ang:
PROJECT		DRAWING NO.	C247-01			0 $\pm 1^\circ$
SHEET	1 of 1	UNIT	mm			.0 $\pm 0.5^\circ$
						.00 $\pm 0.25^\circ$
						Dim: 0 ± 0.15
						.0 ± 0.10
						.00 ± 0.05