
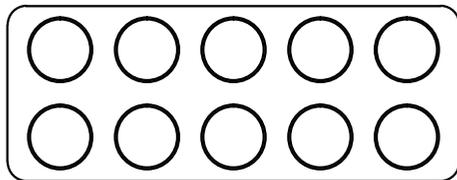
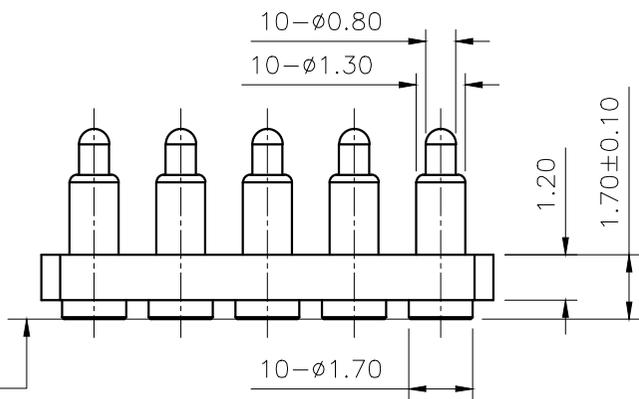




Please Approve this Drawing

Date

Signature

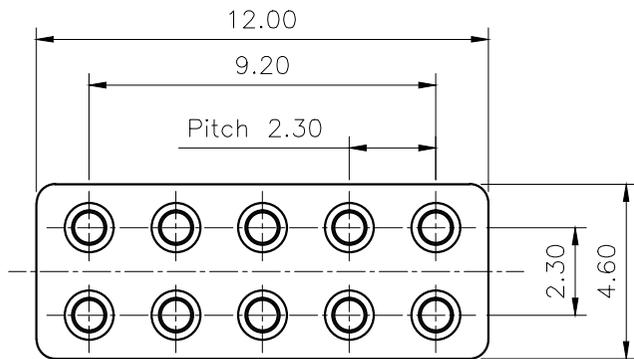

NO.	Part Name	Q'TY	Material	Plated surface
1	Plunger	10	C3604	AU 3 U" MIN OVER 50~100 U" NI
2	Barrel	10	C3604	AU 3 U" MIN OVER 50~100 U" NI
3	Spring	10	SUS304	Not Plated
4	Housing	1	ABS	Black

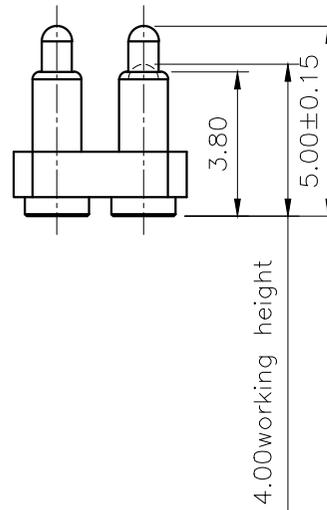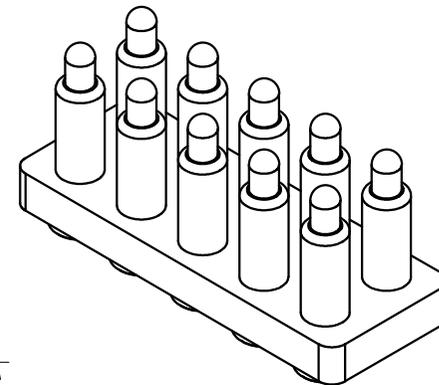

Notes:

- 1.Electrical
 - Rated Current&Voltage:DC 12V 1A
 - Contact Resistance:50 mohm maximum at Working Height(quiescence)
- 2.Mechanical
 - Spring Force :100g±20% at Working Height
 - Durability:10000 Cycles(minimum)
- 3.To ensure the best usage,please operate it based on the working Height
 - Based on the Engineering Drawings,shall not exceed the maximum allowed compression

DRAWN	Ant	DATE	2014.05.09			Dongguan Promax Electronics Technology Co., Ltd
CHECKED		SCALE	10:1	VER.	B.0	
APPROVED		TITLE	pogo pin connector.			Ang:
PROJECT		DRAWING NO.	C031-10P			0 ±1°
SHEET	1 of 1	UNIT	mm			.0 ±0.5°
						.00 ±0.25°
						0 ±0.15
						.0 ±0.10
						.00 ±0.05

VER.	DESCRIPTION	ECN NO.	DATE