
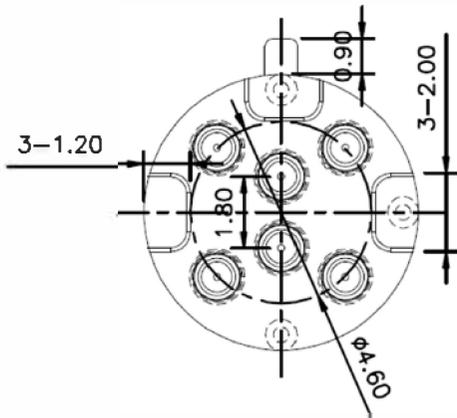
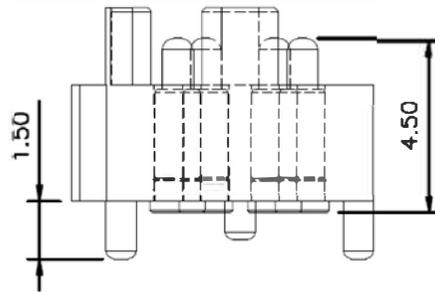
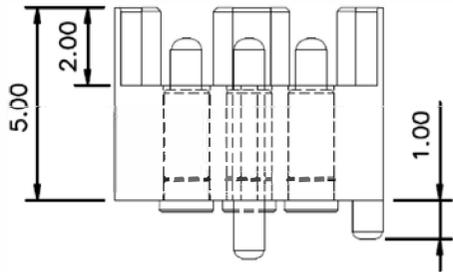


Please Approve this Drawing


Date	
Signature	

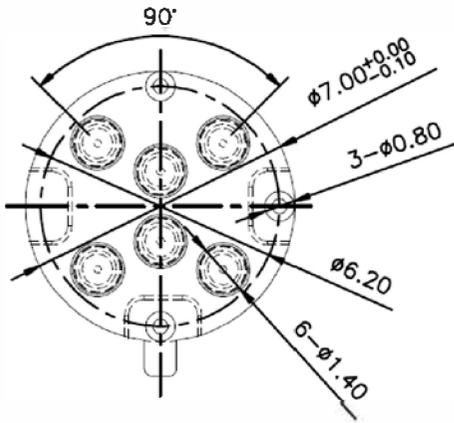

NO.	Part Name	Q'TY	Material	Plated surface
1	Plunger	6	C3604	AU 5 U" MIN OVER 50~100 U" NI
2	Barrel	6	C3604	AU 3 U" MIN OVER 50~100 U" NI
3	Spring	6	SUS304	Not Plated
4	Housing	1	LCP	Black

NOTES:

- Electrical  
Rated Current & Voltage : DC 12 V ; 1A  
Contact Resistance: 50 mohm maximum at Working Height(Quiescence)
- Mechanical  
Spring Force :70g±15gf at Normal Working Height  
Durability:10,000 cycles(minimum)
- Environmental  
Operating Temperature: -25°C~+85°C  
Humidity Range: 10%RH~90%RH  
Salt Spray: 48 Hours
- Part To Be Free Form Manufacturing Lubricants.
- When the current is greater than 1A then need to increase the time delay circuit(3 second)
- To avoid arcing issue, The adaptor start to power supply after connector mated fully.
- To ensure the best usage,please operate it based on the working height.
- RoHs&HF compliant product.

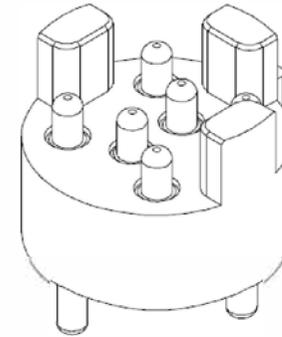

DRAWN	Roy	DATE	2016.02.19		 Dongguan Promax Electronics Technology Co., Ltd
CHECKED		SCALE	10:1	VER. B.0	
APPROVED		TITLE	pogo pin connector.		Ang:
PROJECT		DRAWING NO.	C360-06P		0 ±1°
SHEET	1 of 1	UNIT	mm		.0 ±0.5°
					.00 ±0.25°
					0 ±0.15
					.0 ±0.10
					.00 ±0.05

VER.	DESCRIPTION	ECN NO.	DATE