


Please Approve this Drawing	
Date	
Signature	

NO.	Part Name	Q'TY	Material	Plated surface
1	Plunger	5	HBI59	Au 40u" Min. OVER 50U~120" Ni
2	Barrel	5	HBI59	Au 5u" Min. OVER 50U~120" Ni
3	Spring	5	SUS304	/
4	Housing	1	PA9T; UL94 V-0 Color Black	

NOTES:

- Electrical
 - .Rated Current & Voltage : DC 12 V ; 2.0A Max.
 - .Contact Resistance: 50 mohm maximum at Working Height(Quiescence)
- Mechanical
 - .长Pin Full store: 1.65 mm
 - .短Pin Full store: 1.35 mm
 - .Spring Force : 70g±20g at Working Height
 - .Durability:25,000 cycles(minimum)
- Environmental
 - .Operating Temperature: -40°C~+85°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 72 Hours
- When the current is greater than 1A then need to increase the time delay circuit(3 second)
- To avoid arcing issue, The adaptor start to power supply after connector mated fully.
- To ensure the best usage,please operate it based on the working height.
- .RoHS&HF compliant product.

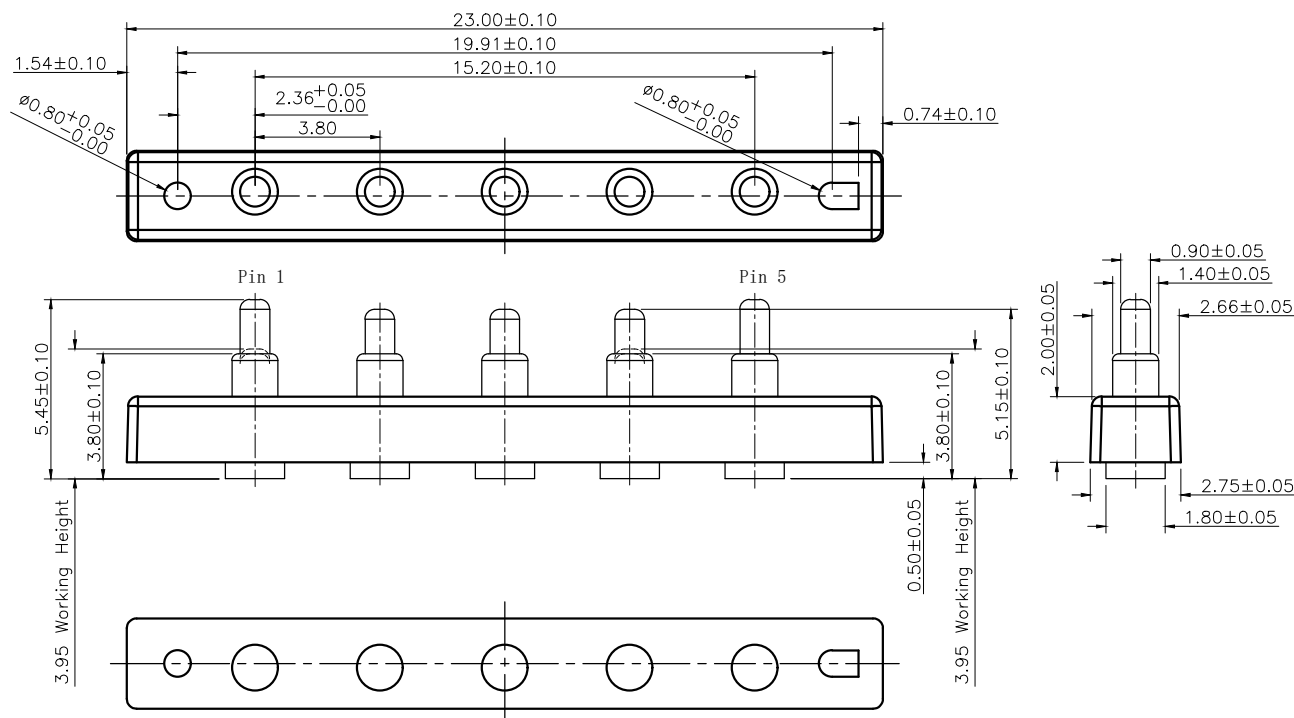

DRAWN	Lys	DATE	2021.07.23				
CHECKED		SCALE	10:1	VER.	A.0		
APPROVED		TITLE	pogo pin			Ang:	Dim:
PROJECT		DRAWING NO.	NC3605-05PA			0 ±1°	0 ±0.25
SHEET	1 of 1	UNIT	mm			.0 ±0.5°	.0 ±0.20
						.00 ±0.25°	.00 ±0.10

VER.	DESCRIPTION	ECN NO.	DATE