


Please Approve this Drawing

Date



Signature

NO.	Part Name	Q'TY	Material	Plated surface
1	Plunger	1	BeCu	Gold Plated
2	Barrel	1	PBT	Gold Plated
3	Spring	1	SUS	Gold Plated
4				

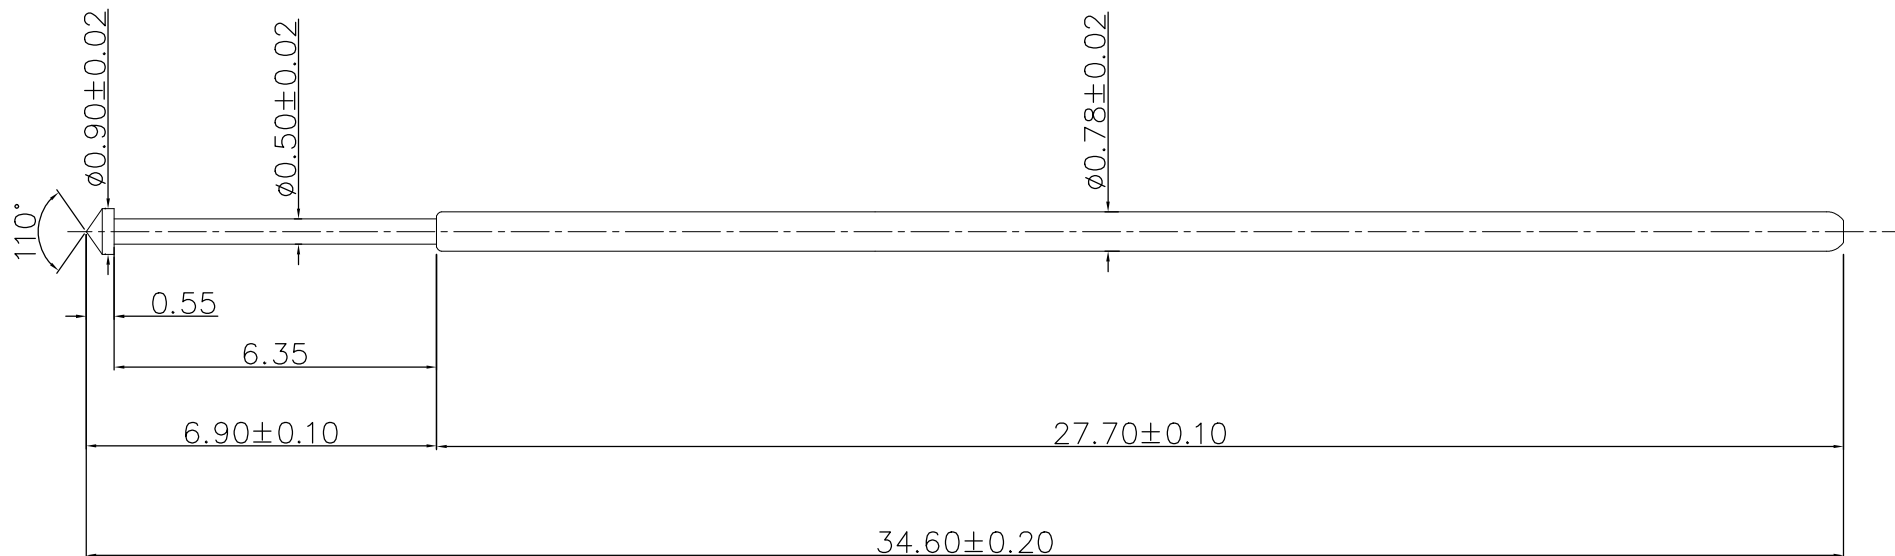

NOTES:

- Electrical
 - .Current Rating: 3.0A (Reference Only) (Based on 180 sec.Continuous)
 - .Contact Resistance: Less than 185 mohm at Recommended Travel(Quiescence)
- Mechanical
 - .Full Travel: 6.35mm
 - .Spring Force: 160gf \pm 20%gf at Recommended Travel(6.00mm)
 - .Operating Temperature: -40°C~+150°C
 - .Durability: 200,000 cycles(minimum)
 - .Pointing Accuracy: ± 0.08 mm

DRAWN	hzx	DATE	2025/8/18			 Dongguan Promax Electronics Technology Co., Ltd.
CHECKED	xxl	SCALE	10:1	VER.	A.0	
APPROVED	lys	TITLE	Probes			Ang:
PROJECT		DRAWING NO.	PT078B160-3460A			0 $\pm 5^\circ$
SHEET	1 of 1	UNIT	mm			.0 $\pm 3^\circ$
						.00 $\pm 1^\circ$
						Dim: 0 ± 0.20
						.0 ± 0.15
						.00 ± 0.10

VER.	DESCRIPTION	ECN NO.	DATE