


Please Approve this Drawing

Date

Signature

NO.	Part Name	Q'TY	Material	Plated surface
1	Plunger	1	C3604	Au 10u" Min. Over 50~100 u" Ni
2	Barrel	1	C3604	Au 10u" Min. Over 50~100 u" Ni
3	Spring	1	SUS304	Not Plated
4				

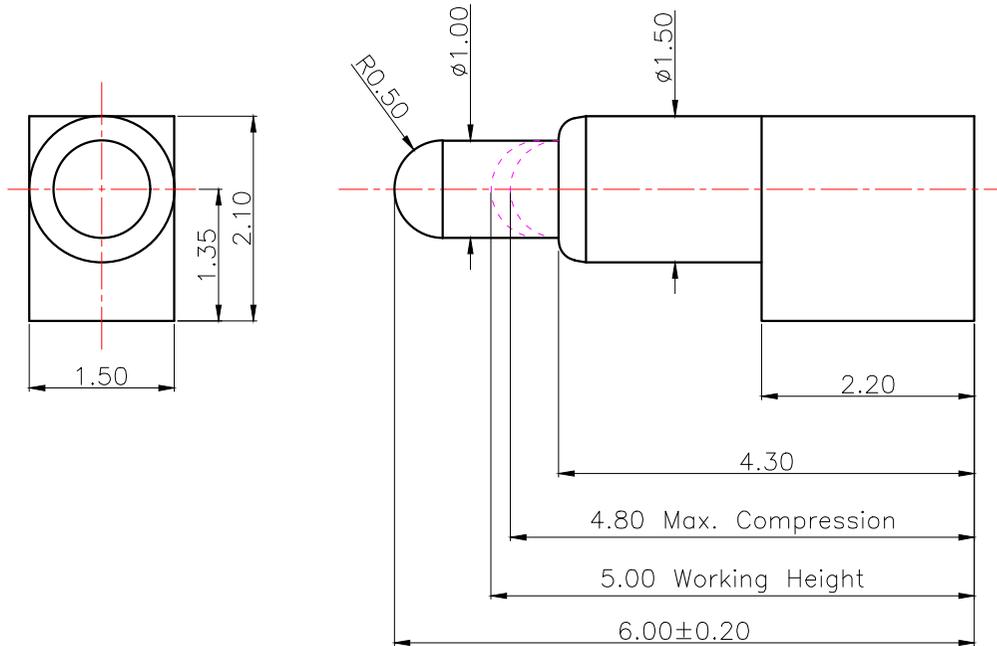

Notes:

- 1.Electrical
  - Rated Current&Voltage:DC 12V 2.0 A Max.
  - Contact Resistance:50 mohm maximum at Working Height(quiessence)
- 2.Mechanical
  - Spring Force :110g±20g at Working Height
  - Durability:10000 Cycles(minimum)
- 3.To ensure the best usage,please operate it based on the working Height
- 4.Based on the Engineering Drawings,shall not exceed the maximum allowed compression

DRAWN	Ant	DATE	2014.10.29			 Dongguan Promax Electronics Technology Co., Ltd
CHECKED		SCALE	10:1	VER.	B.0	
APPROVED		TITLE	pogo pin connector.			Ang:
PROJECT		DRAWING NO.	C090-01			0 ±1°
SHEET	1 of 1	UNIT	mm			.0 ±0.5°
						.00 ±0.25°
						Dim: 0 ±0.15
						.0 ±0.10
						.00 ±0.05

VER.	DESCRIPTION	ECN NO.	DATE