

Please Approve this Drawing





Date

Signature




NO.	Part Name	Q'TY	Material	Plated surface
1	Plunger	4	C3604	AU 10 U" MIN OVER 50~120 U" NI
2	Barrel	4	C3604	AU 5 U" MIN OVER 50~120 U" NI
3	Spring	4	SUS304	Not Plated
4	Housing	1	HTN	Black
5	CAP	1	HTN	Black

NOTES:

- Electrical
 - .Rated Current & Voltage : DC 12 V ; 1A Max
 - .Contact Resistance: 60 mohm maximum at Working Height(Quiescence)
 - .Insulation Resistance: 500MΩ Min. at 500VDC/Minute
 - .Dielectric Withstanding Voltage: At 500VAC/Minute No Breakdown
- Mechanical
 - .Spring Force: 45gf±10gf at Normal Working Height
 - .Durability:10,000 cycles(minimum)
 - .Contact Retention Force:200gf/PIN Mln.
- Environmental
 - .Operating Temperature: -25°C~+85°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
- Part To Be Free Form Manufacturing Lubricants.
- When the current is greater than 1A then need to increase the time delay circuit(3 second)
- To avoid arcing issue, The adaptor start to power supply after connector mated fully.
- To ensure the best usage,please operate it based on the working height.
- .RoHS&HF compliant product.

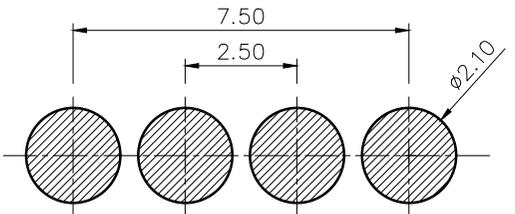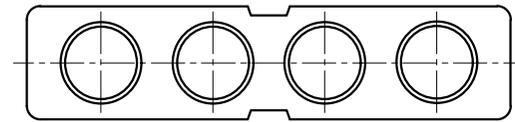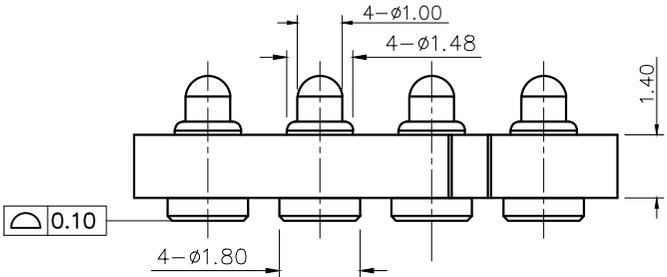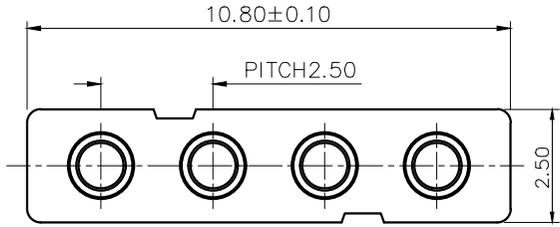

RECOMMEND PCB LAYOUT
Layout Tolerance: ±0.05mm

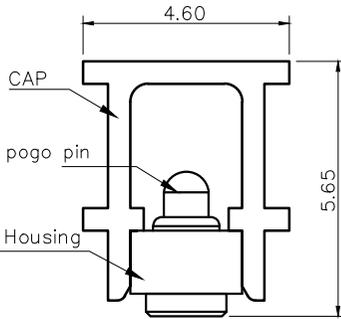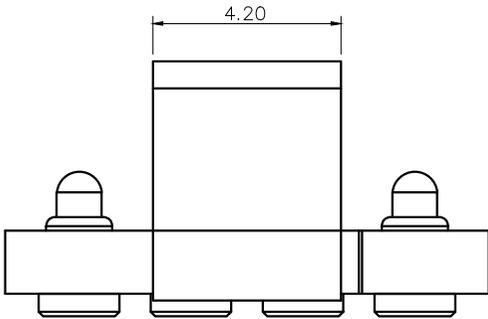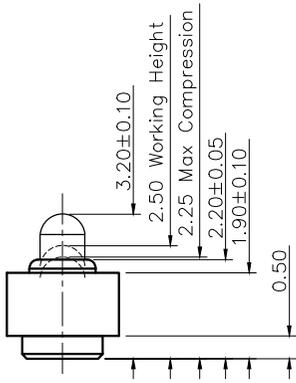

VER.	DESCRIPTION	ECN NO.	DATE

DRAWN	tony	DATE	2020.02.26		 Dongguan Promax Electronics Technology Co., Ltd
CHECKED		SCALE	10:1	VER. B.0	
APPROVED		TITLE	pogo pin connector.		Ang:
PROJECT		DRAWING NO.	C1608-04R		0 ±1°
SHEET	1 of 1	UNIT	mm		.0 ±0.5°
					.00 ±0.25°
					Dim: 0 ±0.15
					.0 ±0.10
					.00 ±0.05